RoGeo PD Service

In-line High-Resolution Pipe Movement Screening and Strain Assessment



Cost-effective pipeline



World's largest ILI tool fleet ensures high availability



Cost-effective

Pipeline assets are at risk of reduced operational performance, damage and eventual failure because of geometrical deformation. High-resolution in-line inspection (ILI) and mapping of your pipelines can detect, categorize and locate deformation, enabling you to act before minor damage turns into a major shutdown. You cannot predict geohazards, climate extremes or the actions of third parties that might damage your pipelines. However, you can design and implement a holistic and integrated geometric deformation risk management strategy. This reduces your risk and, as part of a wider integrity management framework, can identify multiple threats to further safeguard your pipeline assets.

Geohazards, such as seismic events resulting in seabed and ground movements and associated landslips, sediment falls and soil liquefaction, all cause pipeline movement. This, in turn, can cause stresses and strains on the pipelines that threaten performance and integrity. Our RoGeo PD (Pipe Drift) Service allows for regular, cost effective inspections of a pipeline that is prone to geo-hazards, and minimizes the impact on pipeline operations.

The corresponding in-line pipeline inspection tool has a robust chassis that incorporates an inertial measurement unit (IMU). It can move at high speeds up to 8 m/s and quickly identify pipeline movement, minimizing the operational impact of such an inspection. The multiple instruments collect both linear and rotational inertial and record time data, which can be analyzed to provide bending strain information.

- Regularly identify and locate pipeline movement with minimal operational impact
- Understand resulting pipeline strain and stress profiles
- Act guickly to take remedial action and prevent performance loss



RoGeo PD Can Determine if Your Pipeline Has Moved after Geohazard Events

- · Rapid deployment capability to inspect pipeline integrity after major geohazards, such as seismic events and extreme weather, and respond rapidly to prevent or fix pipeline containment loss
- Understand the impact of pipeline movement on the stress profile to determine if bending strains will cause buckles and resulting performance loss
- Cost-efficient solution for high frequency of inspections in areas with high geohazard risk; no above-ground markers required



Remarks and Features


- Other tool sizes are available on request
- Higher pressure rating available on request
- Tailored solutions with different specifications available
- API 1163 certified services
- CE certification available

- ATEX certification available on request
- Contact ROSEN for more detailed information about the presented service
- Specifications are subject to change, depending on specific requirements or tool configurations

Technical Specifications


Standard Operating Specifications

Product temperature range	0°C – 55°C (32°F – 131°F)
Maximum operating pressure	15 MPa (2175 PSI)
Operating speed range	Up to 8.0 m/s (26,3 ft/s)*
Max. velocity variation per joint	0.3 m/s (1 ft/s)
Minimum pipeline bend radius	1.5D (3D in 8inch)
Maximum operating time	Up to 80 hours @ 20°C (68 °F)
Maximum inspection length**	1440 km (880 miles)

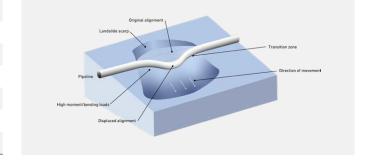

Notes: Please contact ROSEN for more detailed information.

^{**}Specifications are subject to change due to specific requirements or tool configurations

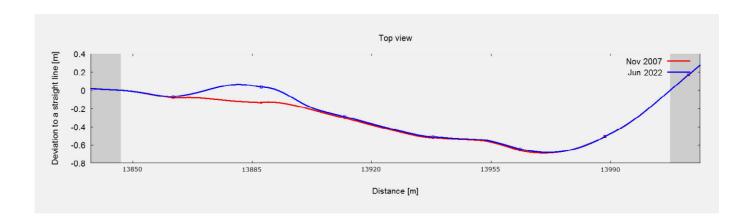

Obere Spichermatt 14 · 6370 Stans · Switzerland Phone: +41-41-618-0300 info@rosen-group.com

ROSEN-Group_Serviceflyer_RoGeo_PD_v2-0_2025 © 2024 ROSEN Swiss AG. All rights reserved.

This document is the property of ROSEN Swiss AG who will safeguard its rights according to the applicable civil and criminal law provisions. No part of this document may be reproduced without the prior written consent of ROSEN

The information provided in this document is for general informational purposes only and is based on current technical knowledge and experience. It does not constitute any professional advice or any legally binding offer. While every

effort has been made to ensure the accuracy of the information provided, no warranties, guarantees or representations, either expressed or implied, are made as to the completeness, accuracy, reliability, or timeliness of the information.

This document may be updated and amended by ROSEN from time to time due to technical, regulatory and / or legal requirements or changes without prior notice. Only the latest version of this document is applicable; all earlier versions shall cease to be valid.



www.rosen-group.com

^{*}This speed range may vary if the cleaning tool in use has a lower maximum allowed velocity.