

RoMat DMG Service

In-line Detection of Volumetric Hard Spots



Data acquisition and storage for code compliance



Multiple services possible in a single test run




Draws on the largest tool fleet in the world

Understanding the materials properties of your pipeline assets is not only essential for threat management, but a regulatory requirement. We offer a wide variety of pipeline material verification procedures as part of our RoMat service suite. These are based on technologies that are industry proven and produce reliable, high-resolution data that can underpin your holistic pipeline management strategy. These procedures are designed to work flexibly around the specifications of your network and can be applied across a range of pipe diameters, flow rates, temperatures and pressures. Our capacity to record, process and analyze the acquired material data makes us your ideal pipeline integrity partner from the planning stage through to remedial work.

During the manufacturing process, small imperfections are introduced into the crystalline structure of tubular goods used in the construction of pipeline assets. We understand your need and responsibility to manage the risk of these imperfections manifesting as hard spots in your pipeline walls. If left untreated, they can propagate to become cracks.

Our DMG service detects, measures and classifies internal and external hard spots in your pipeline. Magnetic flux leakage and eddy current measurements taken during an in-line inspection are comprehensively analyzed for anomalies.

- Present and future threats are identified to manage asset integrity
- Hard spots are categorized to optimize your response strategy
- Two test technologies in one inspection run for minimum intrusion

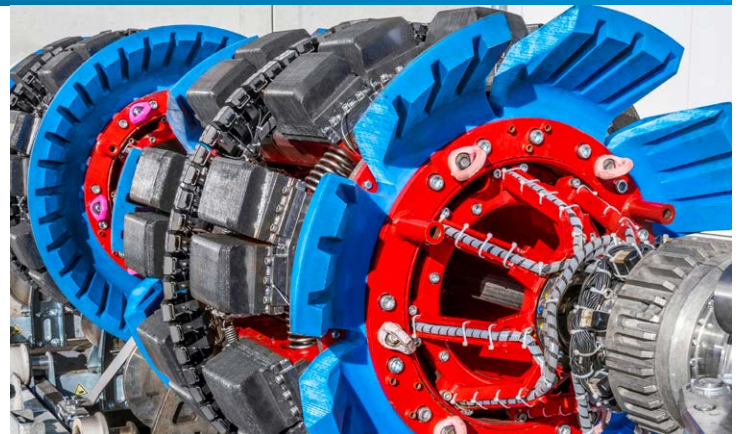

Comprehensive Multi-Sensor Data Gathering to Inform Threat Management Strategies

- Reliable measurement data on location, dimensions and absolute hardness allows for a comprehensive approach to hard spot threat analysis, monitoring and correction
- Technical support available at all phases of the testing, from planning and execution of the inspection to data evaluation and asset integrity review
- A single in-line inspection run can also incorporate metal loss and pipe grade testing at the same time for a multifaceted pipeline integrity test

Remarks and Features

- API 1163-compliant services
- CE and ATEX certification available
- Tailored solutions with different specifications upon request: multiple tool sizes or multi-diameter tools, higher pressure rating
- Contact ROSEN for more detailed information about the presented service
- Specifications are subject to change, depending on specific requirements or tool configurations

Technical Specifications

Standard Operating Specifications

Tool sizes available	6" - 56"
Pipeline product	Gaseous or liquid
Product temperature range	0°C – 65°C (32°F –149 °F)
Maximum operating pressure	15 MPa (2175 psi) 25 MPa (3625 psi) optional
Operating speed range	up to 2.0 m/s (4.5 mph)*
Product flow range	up to 12 m/s (26.8 mph)**
Minimum pipeline bend radius	1.5D
Wall thickness range	4–25 mm (0.15"–0.98")
Maximum operating time	400 hours
Maximum inspection length	800 km (500 miles)

* Depending on inspection parameters

** Fitted with optional speed control unit

Note: Please contact ROSEN for conditions outside of these specifications.

Location and Orientation Capabilities

Axial position accuracy from reference marker 1 m on 1000 m (1 ft on 1000 ft) marker distance	1:1000
Axial position from closest weld	±0.1 m (±4")
Circumferential position accuracy	±5°

The axial positioning accuracy is given at 90 % certainty and is based on following conditions:

1. Distance between upstream (u/s) and downstream (d/s) marker/reference point < 2000m (6500 ft).
2. Actual aboveground distance to both u/s and d/s marker/reference points to be measured and correlated.
3. Marker points are placed correctly according to respective ROSEN marker specification.

Wall Thickness Detection

±1 mm (±0.04") or ±0.1t, whichever value is greater at 80% certainty

Performance Specifications

Differential in material hardness at POD = 90%: ±50HB

ROSEN Swiss AG
Obere Spicher matt 14 · 6370 Stans · Switzerland

Phone: +41-41-618-0300
info@rosen-group.com
www.rosen-group.com

ROSEN-Group_Serviceflyer_RoMat_DMG_v1-0_2024

© 2024 ROSEN Swiss AG.
All rights reserved.

This document is the property of ROSEN Swiss AG who will safeguard its rights according to the applicable civil and criminal law provisions. No part of this document may be reproduced without the prior written consent of ROSEN Swiss AG.

The information provided in this document is for general informational purposes only and is based on current technical knowledge and experience. It does not constitute any professional advice or any legally binding offer. While every

effort has been made to ensure the accuracy of the information provided, no warranties, guarantees or representations, either expressed or implied, are made as to the completeness, accuracy, reliability, or timeliness of the information.

This document may be updated and amended by ROSEN from time to time due to technical, regulatory and / or legal requirements or changes without prior notice. Only the latest version of this document is applicable; all earlier versions shall cease to be valid.